

At a glance

- Quiet running for glass sliding doors up to 250 kg (550 lbs.).
- Best sliding properties and a long lifetime thanks to high-quality plastic rollers and plain anodised tracks.
- Form-fitting glass connection for the greatest possible safety of use.
- Elegant profile design with high optical adaptability.
- Bar bolt locks for integration in locking systems.
- Invisible, point-fixing floor guide or stable two-point guide in floor track, depending on frequency of use.
- Track stops with retainers easily adjustable to the specific door weight.
- Various accessories available.

Technical specifications

HAWA-Junior 80-160/G
 Door weight up to 80, 120, 160 kg
 (176, 264, 352 lbs.)

Glass thickness 8-16 mm
 ($\frac{5}{16}$ " - $\frac{5}{8}$ ")




Height adjustable ± 3 mm ($\frac{1}{8}$ ")

HAWA-Junior 250/G


Max. door weight 250 kg
 (550 lbs.)

Glass thickness 8-16 mm
 ($\frac{5}{16}$ " - $\frac{5}{8}$ ")


Height adjustable ± 5 mm ($\frac{7}{32}$ ")

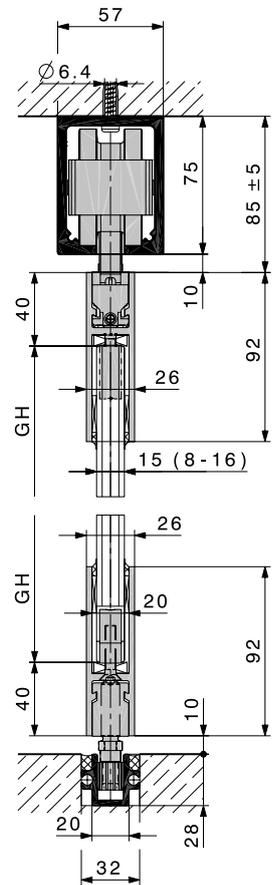

HAWA-Junior 250/G



Glass cut out
 HAWA-Junior 80-160/G.



Glass cut out
 HAWA-Junior 250/G.